

Features

- Double Insurance Safety: Incorporates robust protection circuits for enhanced durability and peace of mind.
- IP68 protection (not for underwater application), UV resistance, and chemical resistance ensure the durability in various environments.
- Maximum 110LM/W efficacy reduces energy costs and heat while extending LED lifespan.
- True 3D bending with no stress points for cleaner installation - ideal for a wide range of indoor applications.
- 5 years warranty


Applications

Living rooms, TV walls, feature walls, under-cabinet areas, staircases, ceiling coves, hallways, etc.

Date	Fixture type
Project name	Project phase



Bending Directions & Diameters

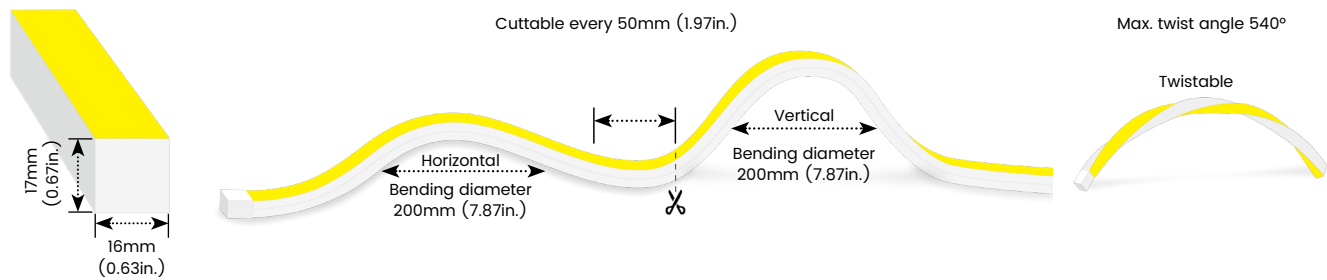

Order Code

Assembly Builder

Model	Bend Direction	Voltage	CCT	Power	Left Feed Entry			
AXE1617	3D-3D bending	24V-DC24V	927-RA90 2700K	096-9.6W/M	F	Front	OW	Open wire 30cm(0.98ft)
			930-RA90 3000K		B	Bottom	MC	Male connector with 30cm(0.98ft) cable
			940-RA90 4000K		S	Side	FC	Female connector with 30cm(0.98ft) cable
					C	Closed	NA	Only for Closed Feed Entry

Assembly Builder

Mounting Order Code

Right Feed Entry			Length	
F	Front	OW	Open wire 30cm(0.98ft)	<b>Max. nominal</b> 11m(36.09ft)
B	Bottom	MC	Male connector with 30cm(0.98ft) cable	<b>Increment</b> 50mm (1.97in.)
S	Side	FC	Female connector with 30cm(0.98ft) cable	
C	Closed	NA	Only for Closed Feed Entry	

Product Code
Please select on the Mounting Options page

\*We will list the nearest actual manufacturing length on the quotation, based on your requested length.

Lumen Output (lm/m)

<b>CCT</b>	<b>9.6W/M</b>
■ 2700K	975
■ 3000K	1061
■ 4000K	1098
Max. Run Length	11m


Technical Details

Efficacy	110.4lm/W @3000K 9.6W
CRI	Ra>90
Beam Angle	110°
LED MacAdam	3 step
IK Rating	IK10 (with aluminium profile)
Average Life (L70B10)	>44,000 hours
Storage Temperature	-40°C- 65°C
Operating Temperature	-40°C- 65°C

Photometry

AXE16173D-24-930-096

LEDLINE AXE 1617, 3D bending, 24V, RA90, 3000K, 9.6W/M




Zonal Lumen Summary


Zone	Lumen	% Fixture
0-30	281.9	26.6%
0-40	460.9	43.4%
0-60	814.2	76.7%
0-90	1041	98.1%
0-180	1061	100.0%

Feed Entry / End Cap Options

FT: Flush Translucent – IP68, factory-made only

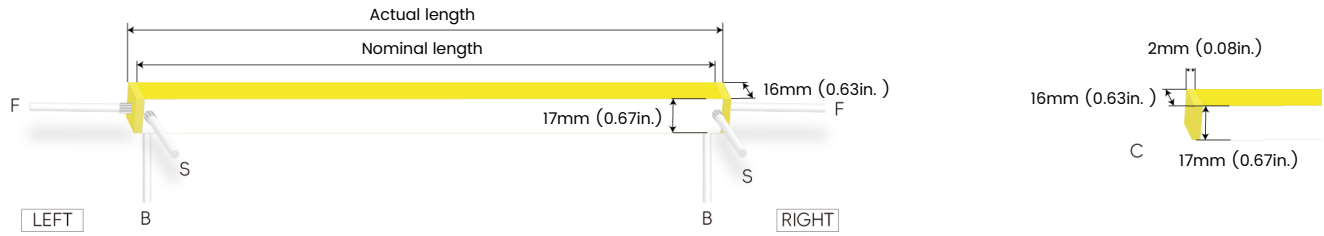


Silicone end cap – IP67, for field cuttable only

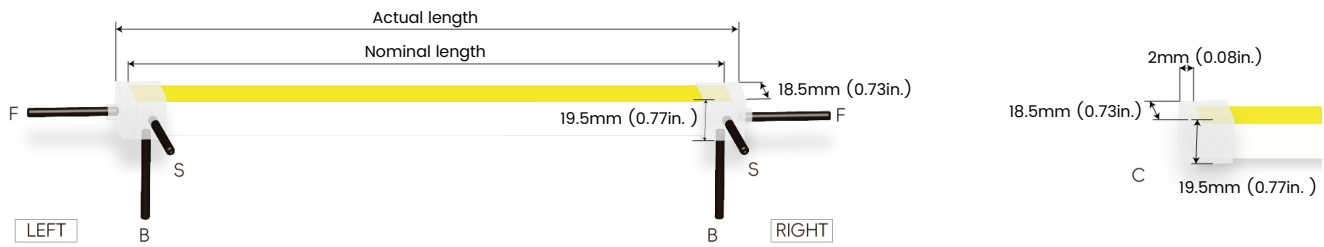

Connector Wire Options



**OW:** Open wire, **Dry only**  
Standard 30cm (0.98ft), 18 AWG,  
wire length customizable




















**MC:** Male connector, **Wet**  
Standard 30cm (0.98ft), 18 AWG




**FC:** Female connector, **Wet**  
Standard 30cm (0.98ft), 18 AWG

Mounting Options

			<p><b>AC167-AP</b></p> <table border="1"> <tr> <td>Name</td> <td>Straight surface profile</td> </tr> <tr> <td>Material</td> <td>Aluminum</td> </tr> <tr> <td>Standard Length</td> <td>1M (3.28ft)</td> </tr> </table>	Name	Straight surface profile	Material	Aluminum	Standard Length	1M (3.28ft)		
Name	Straight surface profile										
Material	Aluminum										
Standard Length	1M (3.28ft)										
			<p><b>AC167-CR</b></p> <table border="1"> <tr> <td>Name</td> <td>Bendable surface profile</td> </tr> <tr> <td>Material</td> <td>Aluminum</td> </tr> <tr> <td>Standard Length</td> <td>1M (3.28ft)</td> </tr> <tr> <td>Min. Bending Diameter</td> <td>600mm (23.6in.)</td> </tr> </table>	Name	Bendable surface profile	Material	Aluminum	Standard Length	1M (3.28ft)	Min. Bending Diameter	600mm (23.6in.)
Name	Bendable surface profile										
Material	Aluminum										
Standard Length	1M (3.28ft)										
Min. Bending Diameter	600mm (23.6in.)										
			<p><b>AC167-EP</b></p> <table border="1"> <tr> <td>Name</td> <td>Straight recessed profile</td> </tr> <tr> <td>Material</td> <td>Aluminum</td> </tr> <tr> <td>Standard Length</td> <td>1M (3.28ft)</td> </tr> </table>	Name	Straight recessed profile	Material	Aluminum	Standard Length	1M (3.28ft)		
Name	Straight recessed profile										
Material	Aluminum										
Standard Length	1M (3.28ft)										
			<p><b>AC167-LP</b></p> <table border="1"> <tr> <td>Name</td> <td>Mud-in profile</td> </tr> <tr> <td>Material</td> <td>Aluminum</td> </tr> <tr> <td>Standard Length</td> <td>1M (3.28ft)</td> </tr> </table>	Name	Mud-in profile	Material	Aluminum	Standard Length	1M (3.28ft)		
Name	Mud-in profile										
Material	Aluminum										
Standard Length	1M (3.28ft)										
			<p><b>AC167-SCRL</b></p> <table border="1"> <tr> <td>Name</td> <td>Bendable mud-in profile</td> </tr> <tr> <td>Material</td> <td>Aluminum</td> </tr> <tr> <td>Standard Length</td> <td>1M (3.28ft)</td> </tr> <tr> <td>Min. Bending Diameter</td> <td>600mm (23.6in.)</td> </tr> </table>	Name	Bendable mud-in profile	Material	Aluminum	Standard Length	1M (3.28ft)	Min. Bending Diameter	600mm (23.6in.)
Name	Bendable mud-in profile										
Material	Aluminum										
Standard Length	1M (3.28ft)										
Min. Bending Diameter	600mm (23.6in.)										
			<p><b>AC167-SGP</b></p> <table border="1"> <tr> <td>Name</td> <td>Straight surface profile</td> </tr> <tr> <td>Material</td> <td>Aluminum with silicone groove</td> </tr> <tr> <td>Standard Length</td> <td>1M (3.28ft)</td> </tr> </table>	Name	Straight surface profile	Material	Aluminum with silicone groove	Standard Length	1M (3.28ft)		
Name	Straight surface profile										
Material	Aluminum with silicone groove										
Standard Length	1M (3.28ft)										
			<p><b>AC167-CSGP</b></p> <table border="1"> <tr> <td>Name</td> <td>Bendable surface profile</td> </tr> <tr> <td>Material</td> <td>Aluminum with silicone groove</td> </tr> <tr> <td>Standard Length</td> <td>1M (3.28ft)</td> </tr> <tr> <td>Min. Bending Diameter</td> <td>600mm (23.6in.) only side bend</td> </tr> </table>	Name	Bendable surface profile	Material	Aluminum with silicone groove	Standard Length	1M (3.28ft)	Min. Bending Diameter	600mm (23.6in.) only side bend
Name	Bendable surface profile										
Material	Aluminum with silicone groove										
Standard Length	1M (3.28ft)										
Min. Bending Diameter	600mm (23.6in.) only side bend										
			<p><b>AC167-BA</b></p> <table border="1"> <tr> <td>Name</td> <td>Light-block profile</td> </tr> <tr> <td>Material</td> <td>Aluminum</td> </tr> <tr> <td>Standard Length</td> <td>1M (3.28ft)</td> </tr> </table>	Name	Light-block profile	Material	Aluminum	Standard Length	1M (3.28ft)		
Name	Light-block profile										
Material	Aluminum										
Standard Length	1M (3.28ft)										

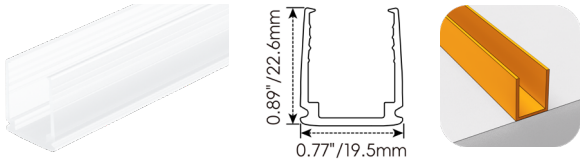


<b>AC167-PC</b>	
Name	PC profile
Material	Polycarbonate
Standard Length	1M (3.28ft)

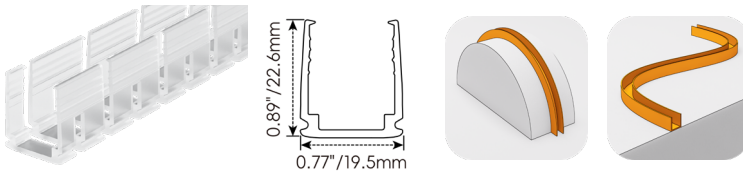


<b>AC167-CPC</b>	
Name	Bendable PC profile
Material	Polycarbonate
Standard Length	1M (3.28ft)
Min. Bending Diameter	300mm (11.8in.)

Clip Options

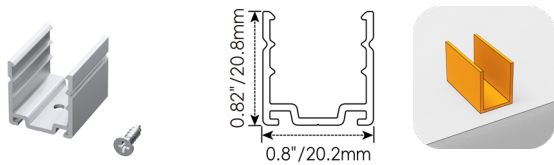


<b>AC167-MC</b>	
Name	Mounting clip
Material	Aluminum
Standard Length	25mm (0.98in.)


Bracket Options

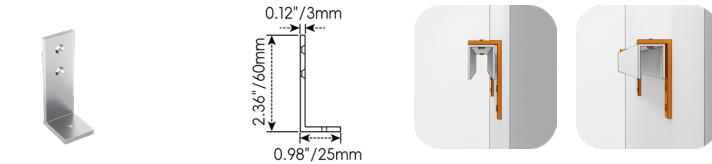

<b>AC167-SET-LA</b>	
Name	L-shaped mounting bracket
Material	Aluminum
Standard Length	20mm (0.79in.)
* AC167-SET-LA must be installed with AC167-AP	

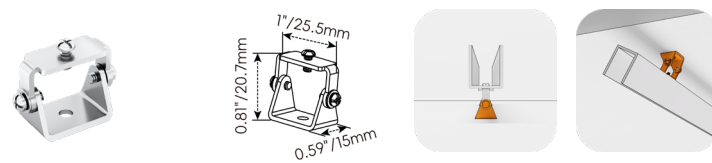


<b>AC167-AMB</b>	
Name	Adjustable mounting clip
Material	Stainless steel
Standard Length	25.5mm (1 in.)
* AC167-AMB must be installed with AC167-AP	

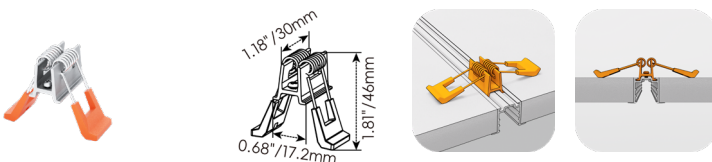


<b>AC167-SET-LC</b>	
Name	Spring clip
Standard Pkg	1pcs
* AC167-SET-LC must be installed with AC167-EP	


Tool Options

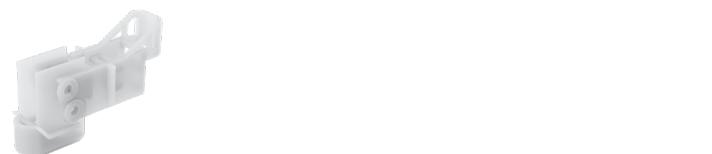


<b>IF-167</b>	
Name	Fixture
Material	Resin
Standard Pkg	1pcs
* Insertion Fixture for AC167-CPC	

**Silicone End Caps (Optional, purchase for extra )**

**AC167-EC**  
Silicone closed end cap



**AC167-EC2-F**  
Silicone end cap front entry with  
30cm(0.98ft) cable, 2 pin



**AC167-EC2-S**  
Silicone end cap side entry with  
30cm(0.98ft) cable, 2 pin



**AC167-EC2-B**  
Silicone end cap bottom entry with  
30cm(0.98ft) cable, 2 pin

**Additional Accessories (Optional, purchase for extra)**

**AD007-2-MCW**  
Male connector,  
30cm (0.98ft) UL white cable,  
2 pin, IP67, Wet, 18 AWG



**AD007-2-FCW**  
Female connector,  
30cm (0.98ft) UL white cable,  
2 pin, IP67, Wet, 18 AWG



**AD007-2-MCB**  
Male connector,  
30cm (0.98ft) black cable,  
2 pin, IP67, Wet, 18 AWG



**AD007-2-FCB**  
Female connector,  
30cm (0.98ft) black cable,  
2 pin, IP67, Wet, 18 AWG



**AF001-1**  
1 Adjustable angle scissors set,  
with 4 spare blades

# LEDLINE AXE 1617 WHT

3D Bending · Static White · High Efficiency

## Drivers

### Non-dimmable

Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24A-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24V	Dry	159 * 97 * 30 mm

### 3 in 1-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24B-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

### DALI-dimmable


Code	Max Load	Input	Output	Environment	Size (L x W x H)
ELG-150-24DA-3Y	150W	100-305VAC	24V	Dry/Damp/IP67	219 * 63 * 35.5 mm

## Wiring Diagram


### Non-dimmable

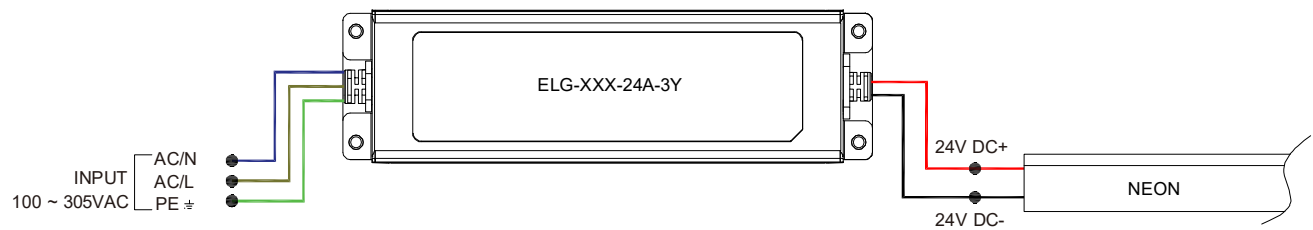

### 3 in 1-dimmable

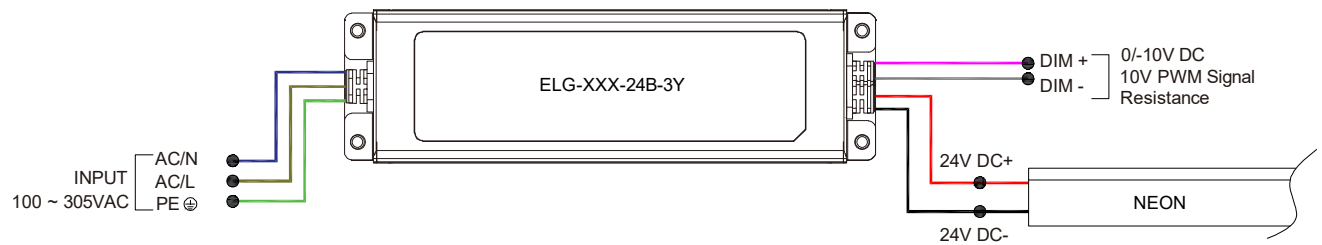

### DALI-dimmable

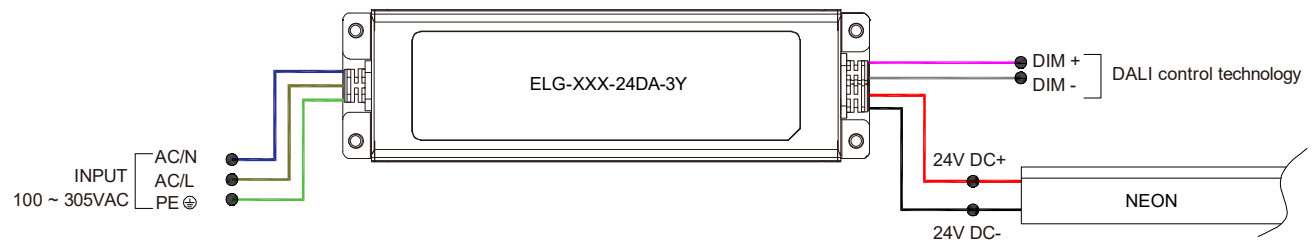

**LEDLINE AXE 1617 WHT**

3D Bending · Static White · High Efficiency

**24V Voltage Drop & Maximum Wire Length Chart**

Based on 24V voltage with a 3% voltage drop allowance. Indicates the maximum wire length from the power supply to the start of the run.

Total load	8AWG	10AWG	12AWG	14AWG	16AWG	18AWG	20AWG	22AWG
10W / 0.4A	484.0m	304.5m	191.4m	120.4m	75.5m	47.5m	29.8m	18.5m
20W / 0.8A	242.0m	152.1m	95.7m	60.0m	37.8m	23.7m	14.9m	9.1m
30W / 1.3A	161.2m	101.5m	63.7m	39.9m	24.9m	15.8m	9.7m	6.1m
40W / 1.7A	121.0m	75.9m	47.8m	29.8m	18.9m	11.8m	7.3m	4.5m
50W / 2.1A	96.6m	60.6m	38.1m	24.0m	14.9m	9.4m	5.7m	3.6m
60W / 2.5A	80.4m	50.6m	31.7m	19.8m	12.5m	7.9m	4.8m	3.0m
70W / 2.9A	68.8m	43.2m	27.1m	17.0m	10.6m	6.7m	4.2m	2.4m
80W / 3.3A	60.3m	37.8m	23.7m	14.9m	9.4m	5.7m	3.6m	2.1m
90W / 3.8A	53.6m	33.8m	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m
100W / 4.2A	48.1m	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m
110W / 4.6A	43.8m	27.4m	17.3m	10.6m	6.7m	4.2m	2.7m	1.5m
120W / 5.0A	40.2m	25.3m	15.8m	9.7m	6.1m	3.9m	2.4m	1.5m
130W / 5.4A	37.1m	23.1m	14.6m	9.1m	5.7m	3.6m	2.1m	1.2m
140W / 5.8A	34.4m	21.6m	13.4m	8.5m	5.1m	3.3m	2.1m	1.2m
150W / 6.3A	32.0m	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m
160W / 6.7A	30.1m	18.9m	11.8m	7.3m	4.5m	2.7m	1.8m	0.9m
170W / 7.1A	28.3m	17.6m	10.9m	7.0m	4.2m	2.7m	1.5m	0.9m
180W / 7.5A	26.8m	16.7m	10.3m	6.7m	3.9m	2.4m	1.5m	0.9m
190W / 7.9A	25.3m	15.8m	10.0m	6.0m	3.9m	2.4m	1.5m	0.9m
200W / 8.3A	24.0m	14.9m	9.4m	5.7m	3.6m	2.1m	1.2m	0.9m
210W / 8.8A	22.8m	14.3m	8.8m	5.4m	3.3m	2.1m	1.2m	0.6m
220W / 9.2A	21.9m	13.7m	8.5m	5.4m	3.3m	2.1m	1.2m	0.6m
230W / 9.6A	21.0m	13.1m	8.2m	5.1m	3.0m	1.8m	1.2m	0.6m
240W / 10.0A	20.1m	12.5m	7.9m	4.8m	3.0m	1.8m	1.2m	0.6m
250W / 10.4A	19.2m	12.1m	7.6m	4.5m	2.7m	1.8m	0.9m	0.6m